



GENIX

WHEREVER YOU DESIRE



MACERATORS & AUTOMATIC LIFTING STATIONS

DAB
WATER • TECHNOLOGY

TOILET

BATHROOM

KITCHEN & LAUNDRY



FULFILL ALL 3 OF YOUR WISHES

GENIX is the new DAB macerator, designed to provide the maximum level of efficiency in the 3 main moments of its lifecycle:

- **Quick and Easy Installation**
- **Comfort in Use with Low Noise**
- **Clean and Simplified Maintenance**

This makes **GENIX** the new benchmark in the setup of a bathroom... where you never thought it was possible.



EVERYTHING YOU NEED IS INCLUDED!

GENIX is provided with everything you need for a quick and easy installation. Fittings with integrated non-return valves, hose clamps, hose adaptors, ground-fixing screws, anti-vibration rubber nubs, and an illustrated quick guide.

Visit the website whiteint.com.au to find out more information on the Genix range.



WaterMark

Certificate number: WM-022990


Technical specification: WMTS-106

WHEREVER YOU DESIRE

GENIX



GENIX WL

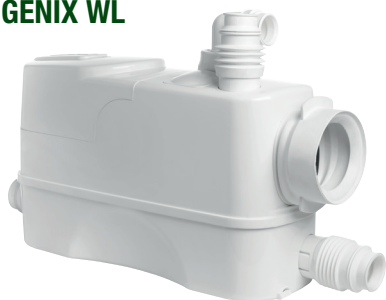

GENIX VT



GENIX is indispensable when the wastewater coming from toilets, showers, dishwashers or sinks cannot be expelled by gravity. DAB lifting stations can be installed wherever there is the wish to add a toilet or expel greywater during new installations, renovations or new constructions.



GENIX 	110 807410 1 (TOP)	✓	✓	✓			
	130 807411 2 (SIDE) + 1 (TOP)	✓	✓	✓	✓	✓	✓
	COMFORT110 807412 1 (TOP)	✓	✓	✓			
	COMFORT130 806101 <						


WHITE GLOVE MAINTENANCE



SILENT AND RELIABLE




ACCESSORIES







ACOUSTIC ALARM 807427

To connect on the control board.
It signals the condition of water above
limit and non functioning motor.




FLEXIBLE HOSE ADAPTER 807426

Composed by a 500mm flexible pipe,
fitting and metal clamps to adapt the
GENIX installation to competitors'
models having the delivery pipe on
the opposite side.

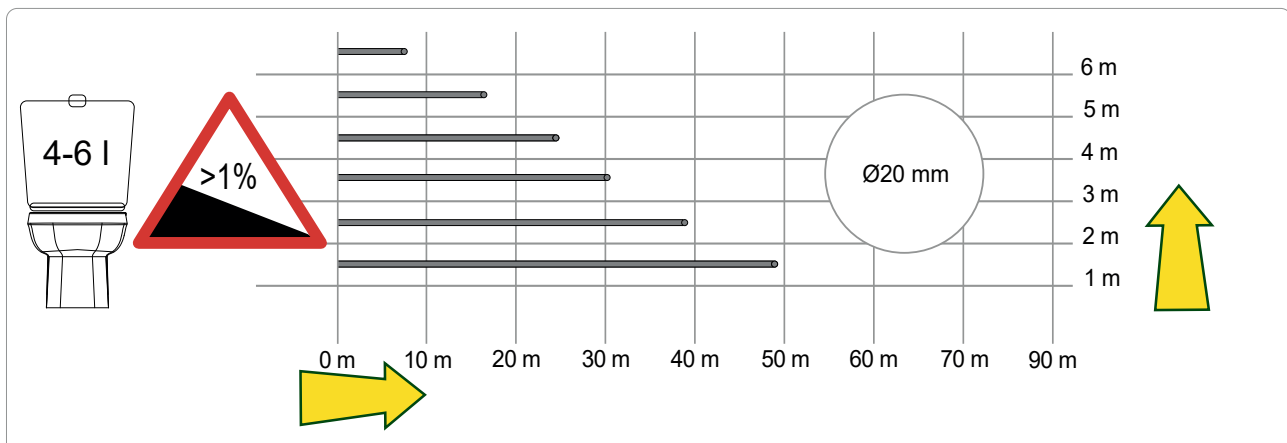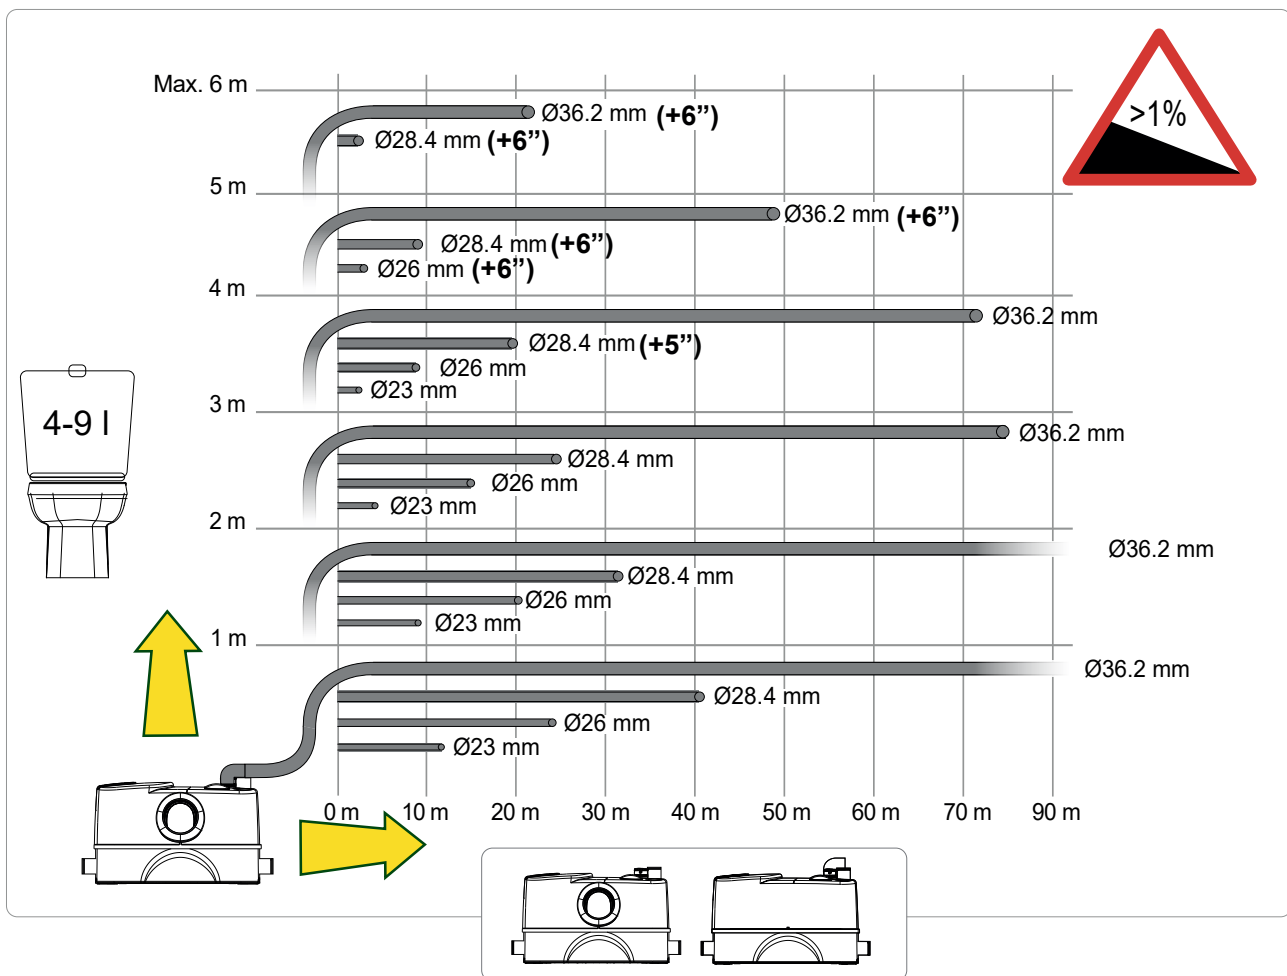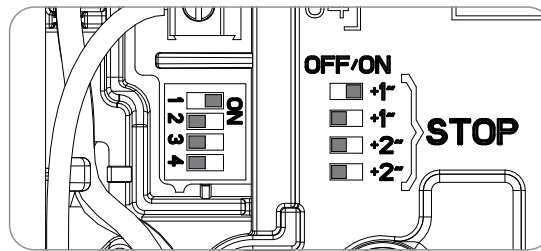

TECHNICAL DATA

			
	GENIX	GENIX WL	GENIX VT
Inlets	GENIX 110: 1 + 1	GENIX WL 110: 1 + 1	GENIX VT 010: 1
	GENIX 130: 1 + 3	GENIX WL 130: 1 + 3	GENIX VT 030: 3
Liquid temperature range:	From 0° to +50°C.	From 0° to +50°C.	From 0° to +75°C. Up to 90°C for 30min.
Liquid pumped:	Sewage water containing fecal matter as regulated by EN 12050-3		Grey wastewater without fecal matter. The unit is designed according to EN 12050-2.
Third party certifications:	VDE-GS, LGA, VDE-EMC		
Tank capacity and delivery:	Approved for flush volumes of 6 and 9 litres as regulated by EN 12050-3		Tank volume: 10 Litres Delivery: Max. flow 130 l/min
Max. pump head:	8 metres		
Max. system head:	6 metres		
International protection grade:	IP44		
Dimensions:	456mm (L) x 178mm (D) x 277mm (H)		
Dimensions of inlet:	DN 36/40/50		
Dimensions of discharge:	DN (22/25/28/32/36/40)		
Start and stop levels:	Start: 72mm above bottom		
	Stop: 52mm above bottom		
Ambient temperature:	From +5°C to 40°C		
Noise level:	<70db(A) to 12050		
Duty class:	S3-50% 1min. (30 sec on; 30 sec off).		

Available from your local DAB distributor:

AUS/NZ_DABGENIX_JUNE2020

WHITE INTERNATIONAL PTY LTD

60 Ashford Ave Milperra NSW 2214
PO Box 304 Milperra NSW 2214
Phone 02 9783 6000 Fax 02 9783 6001
Customer Service 1300 783 601
Email Sales: pumpsales@whiteint.com.au
www.whiteint.com.au

WHITE INTERNATIONAL NZ LTD

15G Kerwyn Avenue
East Tamaki, Auckland 2013, New Zealand
Phone 09 579 9777 Fax 09 579 7775
Customer Service 0800 509 506
Customer Service Fax 0800 804 344
Email Sales: sales@whiteint.co.nz
www.whiteint.co.nz



Please always refer to our website for further technical information & new product innovations

Disclaimer: Every effort has been made to publish the correct details in this brochure.
No responsibility will be taken for errors, omissions or changes in product specifications.
Product images are representations only.

Scan QR Code on your
smart phone or iPad to
save a digital version.

